

1913
W67

WILLIAMS

Design of a Steel Grand-Stand

Civil Engineering

B. S.

1913

THE UNIVERSITY
OF ILLINOIS
LIBRARY

1913
W67



DESIGN OF A STEEL GRAND-STAND

BY

ROY CAMPBELL WILLIAMS

THESIS

FOR

DEGREE OF BACHELOR OF SCIENCE


IN

CIVIL ENGINEERING

COLLEGE OF ENGINEERING

UNIVERSITY OF ILLINOIS

1913



Digitized by the Internet Archive
in 2014

<http://archive.org/details/designofsteelgra00will>

1017
1913

UNIVERSITY OF ILLINOIS
College of Engineering

May 24, 1913.

I recommend that the thesis prepared under my supervision by ROY CAMPBELL WILLIAMS entitled Design of a Steel Grand-Stand be approved as fulfilling this part of the requirements for the degree of Bachelor of Science in Civil Engineering.

C. W. Malcolm

Asst. Professor of Structural Eng'g.

Recommendation approved

Ira O. Baker.

Head of Department of
Civil Engineering.



TABLE OF CONTENTS.

INTRODUCTION	Page. 1.
GENERAL FEATURES OF THIS DESIGN	2.
LOADS AND STRESSES	3.
SPECIFICATIONS USED	3.
ESTIMATED COST	5.

DESIGN OF A STEEL GRAND-STAND.

INTRODUCTION.

Within the last few years there has been a great increase in the construction of large steel and reinforced-concrete grand-stands and a corresponding decrease in the construction of wooden ones. The first large steel grand-stand was erected at Monmouth, New Jersey. It is 700 ft. long, 210 ft. wide, and has a seating capacity of 10,000 people. The roof is of the cantilever type, extending 75 ft. to the front and 25 ft. to the rear. Another stand of large capacity was built at Yonkers, New York, for the Empire City Trotting Club. It is 400 ft. long, 20.5 ft. wide, and 70 ft. high, and has a cantilever roof extending 25.5 ft. to the front and 15.5 ft. to the rear. The entire cost of the structure was \$100,000, and its seating capacity is 7,700. Both the Pittsburg National League and the Chicago American League Base Ball Clubs have recently erected steel grand-stands with capacities of approximately 50,000 people. This great change in the construction of grand-stands is mainly due to three facts: (1) the great increase in the price of lumber, (2) the fact that wooden grand-stands are not fireproof, and (3) that they are unsafe for the great crowds which attend the athletic contests of the present time. The question as to the desirability of building a steel or a reinforced-concrete grand-stand depends to a considerable extent upon its location. If cement and crushed stone are easily obtainable and steel is very expensive to ship in, the reinforced-concrete grand-stand would probably be the one chosen. If local conditions are such that steel and materials for concrete can be obtained with approximately equal transportation charges the steel grand-stand is often chosen, because: (1) it is easier to construct, (2) it is easier to inspect, both during and after construction,

and (3) it is usually cheaper. As this grand-stand is intended for a football field in Chicago, the framework will be built of steel.

GENERAL FEATURES OF THIS DESIGN.

The grand-stand which is designed in this thesis is 300 ft. long, 56 ft. wide, and 45 ft. 6 in. high (see Plate I). The lower deck has a seating capacity of 4000 people and is divided into 2 sections, each 33 ft. in length. Each section has 22 rows of seats, and each row is capable of seating 20 people. The aisles are all 6 ft. wide and terminate in a concrete walk 12 ft. wide which runs along the front of the structure. The tiers of seats are supported on 10" I's 25", spaced 16 ft. 6 in. apart, these in turn being supported by columns spaced 11 ft. apart. The bases of the columns rest upon concrete footings which vary in size from $2\frac{1}{2}$ ft. square to $5\frac{1}{2}$ ft. square, depending upon the load which they support (see Plate II). The front columns are built of Z-bars and plates, while the rear columns are composed of angles and plates. The intermediate columns are made of latticed channels, which give a more economical section for these columns.

The upper deck has a seating capacity of 2,000 (see Plate I). Like the lower deck it is divided into 2 sections, each 33 ft. wide. It has 6 ft. aisles, but has only 11 rows of seats. It is supported by transverse crosses spaced 16 ft. 6 in. apart. Every third cross is a through cross (see Plate IV), supported both in the front and rear by columns, while the two intermediate crosses (see Plate V) are supported at the rear by columns and in front and at the center by longitudinal crosses, which connect with the through crosses (see Plate IV). In this way a minimum number of columns is used, and, as the front 11 ft. of the upper deck is cantilevered and the lower end extends up^{ward} at an angle of about 12 degrees, the view

is practically unobstructed. Exit from the upper deck is obtained by a 5 ft. 6 in. circular-concrete walk which runs along the back of the truss and connects at both ends with stairways which lead to the ground. The rear part of the upper deck is covered by a tar and gravel roof, supported by 2 by 4-in. rafters on 7" [132.75] purlins. See Plate II.

LOADS AND STRESSES.

The stresses (see Tables I and II) in the transverse trusses were solved graphically (see Plate III), while those in the longitudinal trusses, seat beams, columns, etc., were found algebraically. To find the stresses due to wind on the upper deck it was assumed that the horizontal component of the wind was carried down the knee-brace to the seat-beam and thence down into the footings. The rear of the lower deck is to be boarded up. The wind is all taken as horizontal and is assumed to travel down the seat-beam into the front footings. Thus the front column can be designed for direct load only. Assuming that the trusses would weigh 6 lb. per sq. ft. and including the weight of the other materials, it was found that the dead load under the seats would be about 50 lbs. and elsewhere about 20 lbs. per sq. ft. It was assumed that the average person weighed 150 lbs. and as 4 sq. ft. were allowed to each person, the live load was found to be 37.5 lbs. per sq. ft. One hundred per cent was allowed for impact so that the live load used was 75 lbs. per sq. ft. The wind pressure on a vertical surface was taken at 30 lbs. per sq. ft., and the normal values were figured from the straight line formula, $P_n = \frac{C}{45} A$.

SPECIFICATIONS USED.

The design was governed by Ostroff's specification, of which the following are extracts:

(a)

Axial tension in main members, net section, 16000 lbs. per sq. in.

(b)

Extreme fiber stress due to bending, for rolled shapes, built sections,

and plate girders, 13000 lbs. per sq. in.

(c)

Axial compression in main members, gross section, $S = 13000 - 70\frac{1}{2}$.

(d)

Shear on field rivets, 20000 lbs. per sq.in.

Shear on snap rivets, 10000 lbs. per sq.in.

(e)

Bearing of field rivets, 13000 lbs. per sq. in.

Bearing of snap rivets, 20000 lbs. per sq. in.

(f)

Allowable pressure on ordinary earth, $1\frac{1}{2}$ tons per sq. ft.

Allowable pressure on tamped or naturally solid earth, 3 tons per sq. ft.

Minimum size of angle, $2\frac{1}{2} \times 2 \times \frac{1}{4}$ -in.

No rivets, except in beam connections and lacing bars, shall be less than $\frac{3}{4}$ -in.

Estimated Cost.

The estimated cost of the grand-stand designed in this thesis is as follows:

617300 lbs. of steel at $3\frac{3}{4}$ cents per lb.	= \$23167.50
215 cu. yds. of slag-concrete at \$9.00 per cu. yd.	= 1935.00
59 cu. yds. of footing-concrete at \$5.00 per cu. yd.	= 295.00
87 squares of roofing at \$4.00 per square	= 348.00
2240 ft. of $1\frac{1}{2}$ in. gas-pipe @5.0 cts. per ft.	= 123.20
43000 board ft. of lumber at \$45 (laid) per M	= <u>2160.00</u>
Total	= \$28068.70

TABLE 1.

Stresses-Truss "A".

Member	Dead Load	Wind		Live Load	Maximum	Minimum
		Right	Left			
x-1	-21700	+3330	-24300	-2800	-54300	-15040
x-2	-21700	+3330	-25300	-2800	-55300	-15040
x-4	-19900	+ 570	-17800	-3800	-45500	-14200
x-3	-18100	-1500	-18300	-3800	-40200	-13100
x-3	-13150	-2580	-11500	-3800	-35950	-16150
x-11	- 3350	-2730	- 5150	-5500	-19500	- 3350
x-13	- 5500	-2300	- 3850	-2450	-11800	- 5500
x-15	+ 3100	+ 120	0	+9350	+15370	+ 3100
x-17	+ 2950	- 300	0	+4700	+7650	+ 2350
x-13	+ 3000	+1120	0	+4700	+8820	+ 3000
a-1	+13750	-5700	+20300	+7100	+43150	+12050
y-3	+17250	-5330	+17550	+7100	+41900	+11370
y-5	+15650	-3300	+13500	+7100	+33250	+12050
y-7	+14050	-2700	+10400	+7100	+31550	+11350
y-9	+12450	-2130	+7700	+7100	+27250	+10270
y-10	+12450	-2130	+7700	+7100	+27250	+10270
y-12	+8600	-2140	+5140	+5500	+19440	+3630
y-14	+4700	-1900	+3250	+2000	+ 9950	+ 2300
y-13	-5300	-3230	0	-3150	-13730	- 5300
y-13	-2300	-1300	0	-4050	- 3250	- 2300
1-2	-1300	0	-2500	0	- 4300	- 1300
2-3	+2400	-2200	+12300	0	+15000	- 5800
3-4	-2700	+3200	- 7150	0	- 9350	+ 500
4-5	+3050	-3330	+ 3250	0	+11350	- 330
5-6	-3600	+2150	- 7200	0	-10300	- 1450
3-7	+4000	-2320	+ 7300	0	+11300	+ 1330
7-8	-4500	+1600	- 7850	0	-12350	- 2900
3-9	+4300	-1700	+ 3300	0	+13100	+ 3100
9-10	0	0	0	0	0	0
10-11	-11400	+ 100	- 3000	-4950	-24350	-11300
11-12	+10750	- 100	+ 7300	+4700	+23050	+10650
12-13	-13000	+ 330	- 5830	-10350	-29530	-12340
13-14	+12300	- 300	+ 5550	+10100	+27950	+11700
14-15	-25000	-3200	- 3230	-25200	-52430	-25000
15-16	- 3300	-4140	0	-10150	-21090	- 3300
16-17	+ 4700	+2330	0	+ 7150	+14730	+ 4700
17-13	- 4500	-2750	0	-3200	-14050	- 4500
x-a		+3400	-13230		-13230	+ 3400
y-a		-3050	+ 3940		+3940	- 3050


TABLE 2.


Stresses Truss "2".

Member	Dead Load	Wind		Live Load	Maximum	Minimum
		Right	Left			
x-10	- 3800	-2800	-4380	- 3860	-12580	- 3800
x-11	- 460	- 370		- 200	- 2220	- 460
x-13	+ 300	-1480		+ 1050	+ 1580	- 380
x-15	+ 3200	+ 180		+ 3050	+15880	+ 3200
x-17	+ 3100	- 200		+ 4850	+ 7450	+ 2800
x-18	+ 3100	+1150		+ 4500	+ 3750	+ 3100
y-10	0	-4920		0	- 4900	0
y-12	- 450	-3950		- 300	- 5200	- 450
y-14	+ 300	-3070		+ 900	- 3070	+ 300
y-13	- 5400	-3230		- 7250	-16580	- 5400
y-13	- 2700	-1300		- 3900	- 5200	- 2700
10-11	+ 1300	+2930		+ 2400	+ 3280	+ 1300
11-12	- 1550	-2300		- 2250	- 6300	- 1550
12-13	- 3500	+2750		- 5850	- 3250	- 750
13-14	+ 3300	-2570		+ 5000	+ 3300	+ 730
14-15	-11300	- 300		-17400	-29300	-11300
15-13	- 3750	-4150		-10800	-21200	- 3750
16-17	+ 4700	+2300		+ 7200	+14300	+ 4700
17-13	- 4500	-2800		- 3800	-14200	- 4500

PLATE I
 TRANSVERSE SECTION
 FRONT & REAR ELEVATIONS

THESING
 RCH Williams
 DATE 10-23

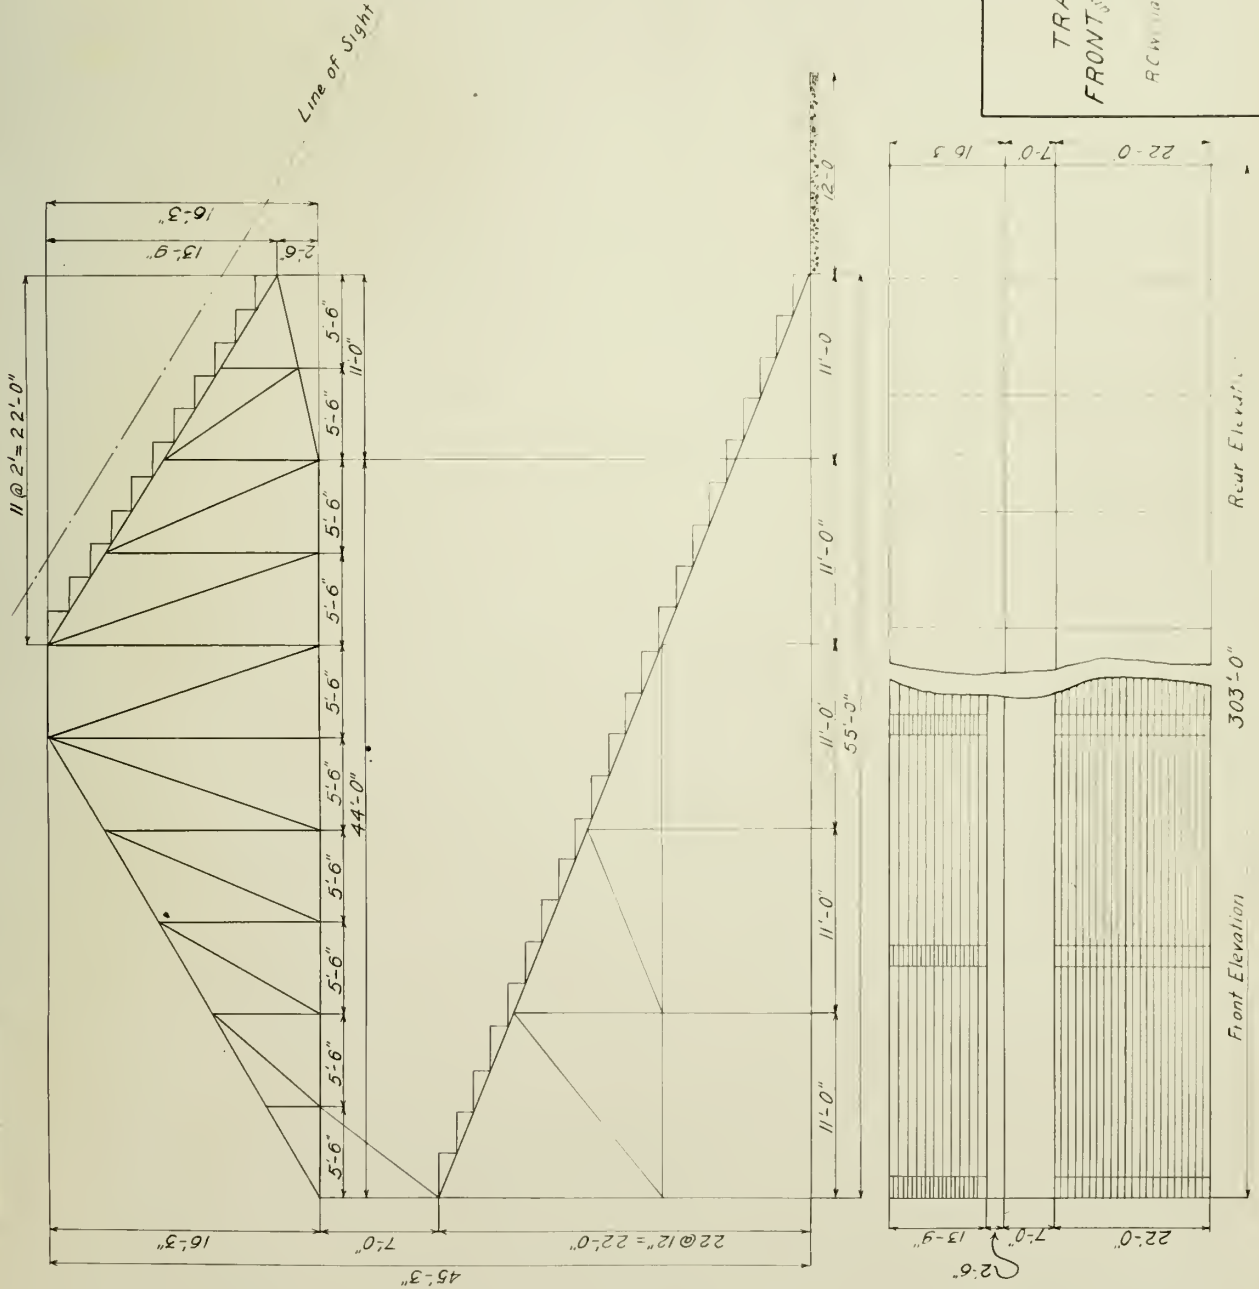

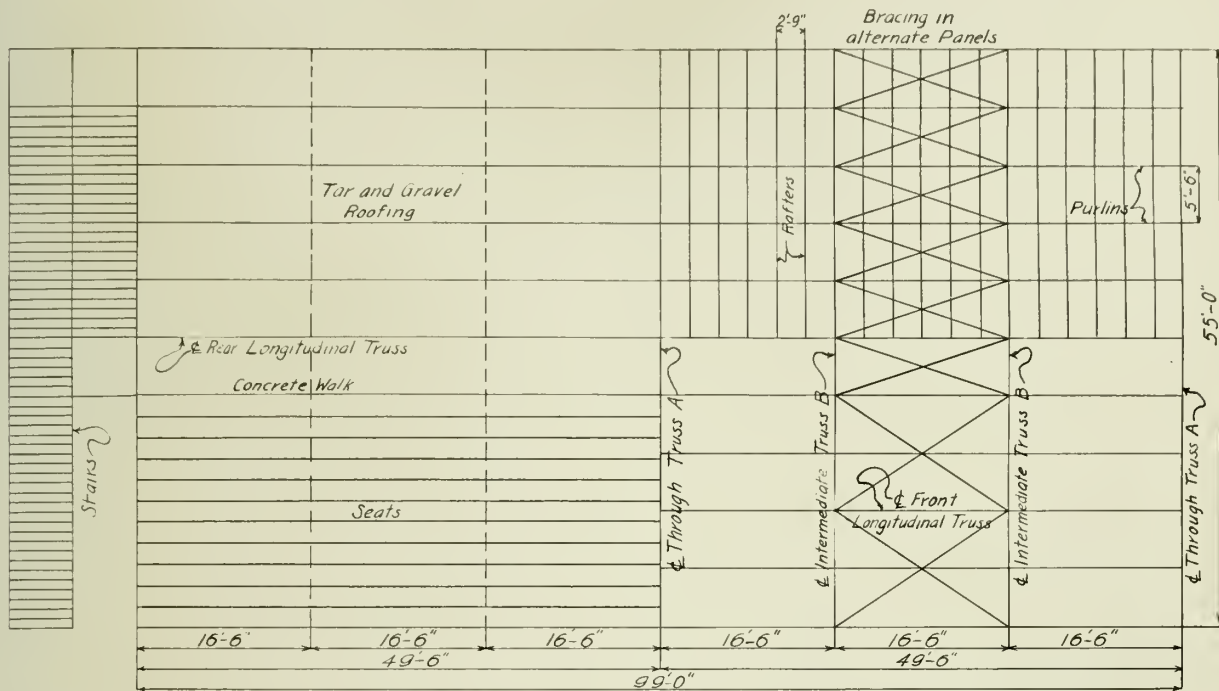

Scale 1"=8'







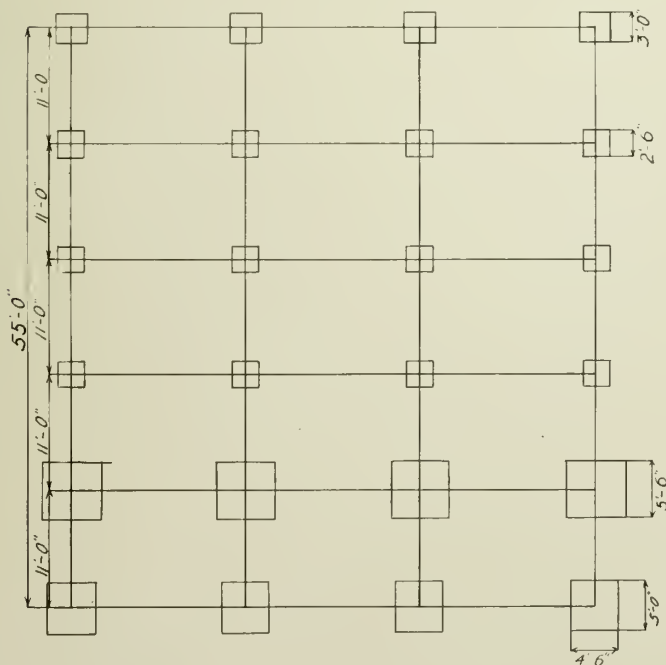


PLATE II
PLAN OF
UPPER and LOWER DECKS
Thesis 1913
RC Williams June 1913

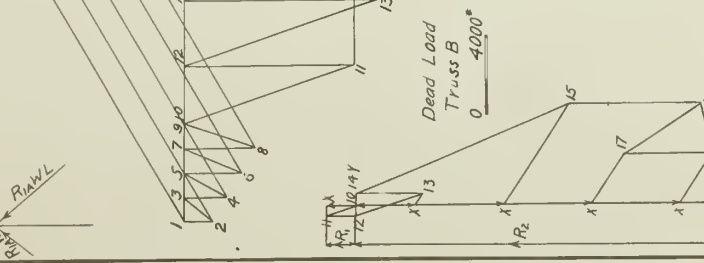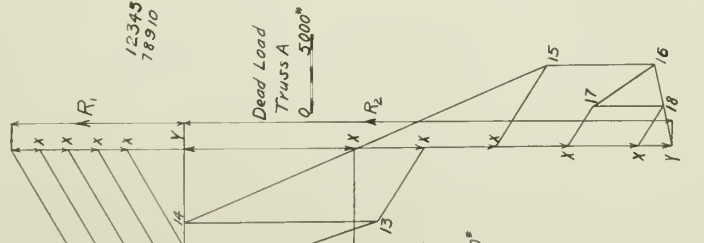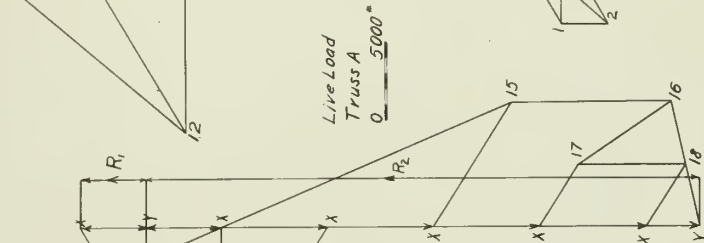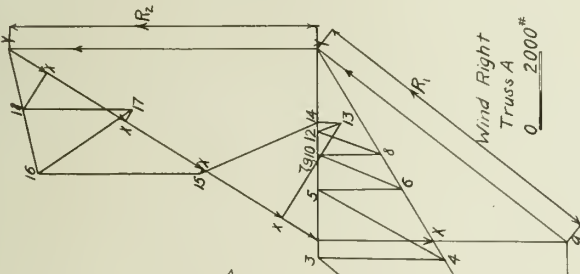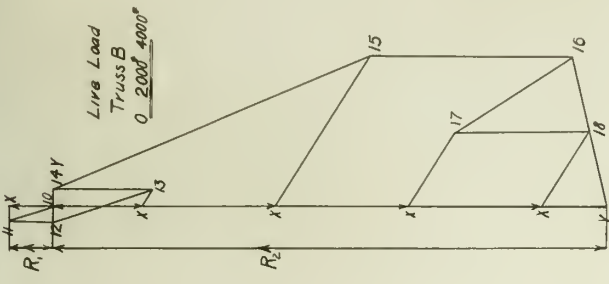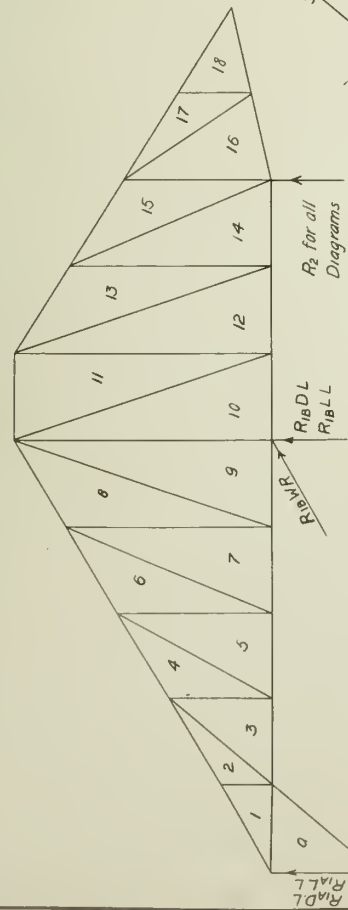

Note
Truss B same as Truss A
with members 1-2, 3, 3-4, 4-5
5-6, 6-7, 7-8, 8-9 omitted

PLATE III STRESS DIAGRAM

For


TRUSSES A and B

Thesis 1913


June 1913

R.C. Williams

Scales as shown

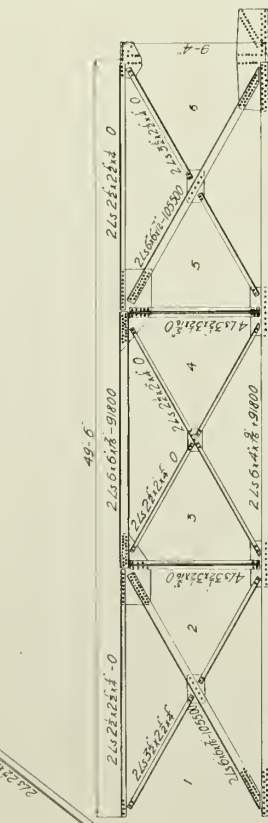


44-3 Rear Longitudinal Truss Scale 1/16"=4ft

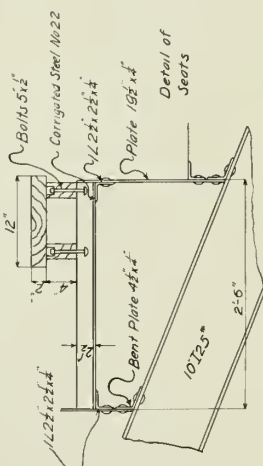


Thesis 1913
RC Williams
June 1913

DRAWING K&E TOOLS


ARE FOUND IN EVERY MODERN ENGINEERING OFFICE



BLUE PRINT APPARATUS for Sun and Electric Printing.
All improvements for increasing printing speed, eliminating noise and giving most satisfactory service are found in our machines.

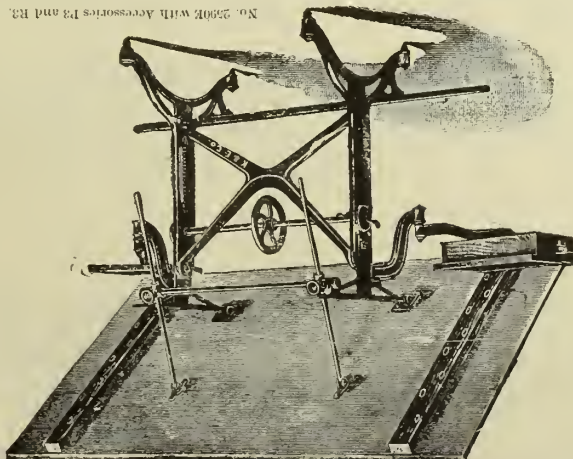

The high standard of quality adopted when the original drawing tables were built by us is always maintained. You cannot buy a better table than a K & E American Drawing Table. Write at once for circular describing our drafting room furniture.



CHESTS OF DRAWERS and CABINETS in all styles.
The range in variety of these units is adequate to meet the demands of any drafting office. Sections are interchangeable and of standard size.

CHICAGO
ST. LOUIS
SAN FRANCISCO
MONTREAL

NEW YORK
KEUFFEL & ESSER CO.
HOBOKEN, N. J.

AGENCIES:
In all the principal cities of the United States, Canada and Mexico.

YOUNG'S

Instruments of Precision

resist the knocks and shocks of transportation better than most engineering instruments. This was proved out in the pioneer railroad days.



and holds good today.

Perfect Accuracy Guaranteed.

Damaging dust is barred from the telescope of a Young transit or level by the slide protector. A ball-bearing attachment (patented) reduces friction to a minimum—all things combining for absolute accuracy and satisfaction in service.

Send for our latest catalog.

YOUNG & SONS

43 N. Seventh St.
PHILADELPHIA
—SINCE 1828—



ARE FOREMOST WITH THE PROFESSION
THE A. LIETZ CO., SAN FRANCISCO, CAL.
ESTABLISHED 1882




Lietz

Hanna Quality Engineering Instruments
Our prices are consistent with QUALITY and our instruments are always of the same HIGH STANDARD
Send for catalog to-day
The Hanna Mfg. Co., Troy, N. Y.



BRANDIS

Instruments of Precision for Civil and Mining Engineers
Surveyors and Astronomers.
Mechanical Perfection.
Unapproachable Accuracy.
If accuracy and stability appeals to you a Brandis instrument will invariably fill these requirements. This is backed up by a half century's experience. You will make no mistake when you purchase a Brandis make. While a few dollars higher in price this is compensated for in quality.
Write for Catalogue.
F. E. Brandis Sons & Co., 810-814 Gates Ave., Brooklyn, N. Y.

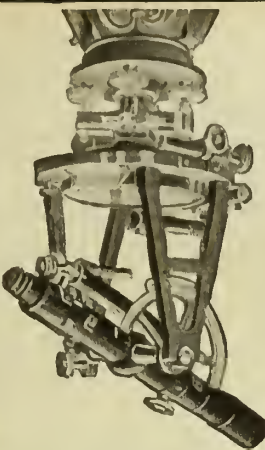

BLUE IN-KO-GRAF AND OTHER PRIMITIVES

DRAWING MATERIAL

ENGINEERING INSTRUMENTS

BLUE PRINT PAPERS


CATALOGUE and Samples FREE to Users of these Supplies

E.G. SOLTSMANN
SOLTSMANN TRADING SQUARE BLDG.
134-140 W 29TH ST.
NEW YORK

Chesterman's Tapes and Rules

Rule No. 390-2. Sample mailed upon receipt of 35c. stamps or cash.


Made by James Chesterman & Co., Ltd., Sheffield, England



FIRMLY established as dependable in every part of the world. Patterns and lengths suited to all users of such articles.

Sole U. S. Agents
Wiebusch & Hilger, Ltd.,
106-110 Lafayette St., N.Y.

Drawing Instruments

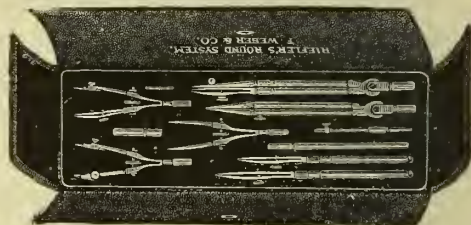

Genuine
RIEFLER
Round
(Tubular)
System

Built for service. All parts interchangeable. Standard line, Universally used and endorsed in Europe. Drawing Instruments of all grades for professionals, schools and colleges.

Catalogue Sent On Request.

F. Weber & Co., Philadelphia

Branch Houses: St. Louis, Baltimore, Other Chicago

Structural Designers

We are pleased to announce the completion of a set of tables for use in designing **Structural Steel Columns**. These tables give the safe loads on all combinations of plate and angle columns with and without cover plates, and for all lengths from 8 ft. to 30 ft. They also give the unit stresses for all values of radius of gyration and all lengths, also all properties of the columns necessary for designing in special cases. (Over 500 different columns are computed for all lengths and can be interpolated to include over 2000.) This is a very valuable set of tables and no engineer should be without it. Price \$2.50. These tables are used and recommended by some of the best engineers in America.

Professor C. W. Cook,
Dept. of Civil Engineering
University of Southern California
Los Angeles, Cal.

LUFKIN MEASURING TAPES

THE LUFKIN RULE CO.
SAGINAW, MICH. NEW YORK
FAVORABLY KNOWN BY USERS.
WIDELY KNOWN THROUGH USERS
RECOMMENDATIONS.

LONDON, England

Johnston's Improved Reels and Tapes

Price of Reel, \$15.00
Combination as above, \$25.00
Descriptive booklet on request. Manufactured and sold only by

ROBERT JOHNSTON
12 North Main Street
WILKES-BARRE, PA.



The Bertsch Imported Positive
BLACK PRINT PAPER
DIRECT PROCESS WATERBATH ONLY
In White, Tinted and Watercolor Papers
and both
No negative required. Excellent results. Keeps longer than
other sensitized paper. Does not become brittle. Ask
your dealer. **ALL PROMINENT DRAWING MATERIAL
DEALERS KEEP IT.**
LOUIS FREY & CO., 116 William St., New York
Sole Agents for United States



The Only Real Tape for Railroads and Surveyors
Chicago Steel Tape Co.'s Product
Carried by all leading supply
houses.
Send for Illustrated Circulars.
6231 Cottage Grove Avenue CHICAGO, ILL.

STRATHMORE PAPER COMPANY
Mittineague, Mass., U. S. A.

Strathmore Detail Paper

If actual needs were given serious consideration a lot more STRATHMORE would be used.
A sample will show you. Write for one





UNIVERSITY OF ILLINOIS-URBANA



3 0112 082197861